

**CISTER**

Research Centre in  
Real-Time & Embedded  
Computing Systems

# Poster

---

## **Multi-Drone Assisted Internet of Things Testbed Based on Bluetooth 5 Communications**

**Kai Li**

**Ning Lu**

**Pei Zhang**

**Wei Ni**

**Eduardo Tovar**

---

CISTER-TR-200205

# Multi-Drone Assisted Internet of Things Testbed Based on Bluetooth 5 Communications

Kai Li, Ning Lu, Pei Zhang, Wei Ni, Eduardo Tovar

CISTER Research Centre

Polytechnic Institute of Porto (ISEP P.Porto)

Rua Dr. António Bernardino de Almeida, 431

4200-072 Porto

Portugal

Tel.: +351.22.8340509, Fax: +351.22.8321159

E-mail:

<https://www.cister-labs.pt>

## Abstract

In this paper, a multi-hop airborne system is built based on Bluetooth5 connected autonomous drones to relay real-time data of Internet of Things (IoT). A new lightweight Onboard Bluetooth Transceiver (OBT) is developed for reliable drone-to-drone and drone-to-ground communications. A graphical user interface is presented to monitor real-time flight trajectory of the drones and end-to-end data delivery. Outdoor experiments are conducted in real world to test autonomous flight control of the drones and received signal strength of the OBT communications.

# Poster: Multi-Drone Assisted Internet of Things Testbed Based on Bluetooth 5 Communications

Kai Li  
CISTER Research Centre  
Porto, Portugal  
kai@isep.ipp.pt

Ning Lu  
AirMind LLC.  
Shanghai, China  
ning.roland@mindpx.net

Pei Zhang  
Carnegie Mellon University  
Pittsburgh, USA  
peizhang@cmu.edu

Wei Ni  
CSIRO  
Sydney, Australia  
wei.ni@data61.csiro.au

Eduardo Tovar  
CISTER Research Centre  
Porto, Portugal  
emt@isep.ipp.pt

## ABSTRACT

In this paper, a multi-hop airborne system is built based on Bluetooth 5 connected autonomous drones to relay real-time data of Internet of Things (IoT). A new lightweight Onboard Bluetooth Transceiver (OBT) is developed for reliable drone-to-drone and drone-to-ground communications. A graphical user interface is presented to monitor real-time flight trajectory of the drones and end-to-end data delivery. Outdoor experiments are conducted in real world to test autonomous flight control of the drones and received signal strength of the OBT communications.

## CCS CONCEPTS

• **Computer systems organization** → **Embedded and cyber-physical systems.**

## KEYWORDS

Autonomous drones, Aerial data relay, System testbed, Experiments

### ACM Reference Format:

Kai Li, Ning Lu, Pei Zhang, Wei Ni, and Eduardo Tovar. 2019. Poster: Multi-Drone Assisted Internet of Things Testbed Based on Bluetooth 5 Communications. In *IPSN '20: The 19th ACM/IEEE International Conference on Information Processing in Sensor Networks, April 21–24, 2020, Sydney, Australia.* ACM, New York, NY, USA, 2 pages. <https://doi.org/10.1145/nnnnnnn.nnnnnnn>

## 1 INTRODUCTION

Employing autonomous drones as aerial data relays has great potential to improve system connectivity, scalability and infrastructure coverage in Internet of Things (IoT) applications, such as intelligent transportation [7], precision agriculture [4], and disaster management [3]. A drone equipped with wireless radios flies along a predetermined trajectory while relaying data of ground IoT nodes as a data mule in the area of interest [6], thanks to its excellent mobility and maneuverability. The short distance line-of-sight (LoS)

communication between the drone and the ground IoT nodes can support high-speed data access and significant channel gain [5].

In this paper, we build a multi-hop airborne relay system for Internet of Things (IoT) based on Bluetooth 5 connected autonomous drones, as shown in Figure 1(a). A new lightweight software defined radio is developed to enable Bluetooth 5 communications for the drones and the ground IoT nodes. The designed Onboard Bluetooth 5 Transceiver (OBT) has a tiny dimension of 36mm x 36mm with a total weight just about 6 g, suitable for bird-size micro drones. Moreover, OBT supports multiple concurrent connections and continuously adapts carrier frequency for anti-jamming capabilities, where the receiver recombines the received signals in the order specified by the transmitter.

## 2 SYSTEM OVERVIEW

The autonomous drone contains two inter-connected modules, i.e., autonomous flight control and OBT communications. The autonomous flight control is implemented based on an MX400 platform [2]. The drone estimates its current position by synthetically analyzing real-time measurements from onboard sensors, such as accelerometers, Gyro sensors, barometers, and compass sensors. The OBT module supports a maximum data rate of 2 Mbps, which enables high-speed data transmission at the drones and the IoT nodes. In addition, OBT detects and prevents interference with WiFi or LTE by carrying out frequency hopping spread spectrum, where one frequency over 40 channels is selected following a pseudo-random sequence at the rate of 1600 hops per second.

## 3 FIELD TEST AND PRELIMINARY RESULTS

We conducted outdoor field experiments for testing the autonomous flight control and measuring Received Signal Strength (RSS) of the OBT communications. The sensory data are generated by the source IoT node, and relayed by two autonomous drones, Drone A and Drone B, to the data sink node. The source IoT node and the sink node are obstructed with no LoS communication link. The two drones move independently along the squared trajectory between the source node and the sink node. The transmission of data packets is initialized by the source node. The data packet is transmitted to the first hop, i.e., Drone A. Once the packet is successfully received, Drone A immediately forwards to Drone B, while an acknowledgement packet is sent to the source node so that a new packet can be transmitted by the source node. A graphical

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](mailto:permissions@acm.org).


*IPSN '20, April 21–24, 2020, Sydney, Australia*

© 2019 Copyright held by the owner/author(s). Publication rights licensed to ACM.

ACM ISBN 978-x-xxxx-xxxx-x/YY/MM...\$15.00

<https://doi.org/10.1145/nnnnnnn.nnnnnnn>

user interface, as shown in Figure 1(b), is implemented based on MindCentral software [1] to monitor real-time flight trajectory of the drones and end-to-end data delivery.

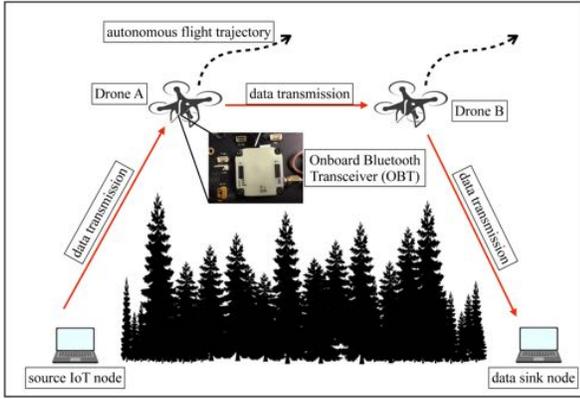

(a) System overview.




(b) Graphical user interface for real-time system monitoring.

**Figure 1: System overview and outdoor field experiments.**

Figure 2 shows preliminary experimental results of RSS measurements of the three Bluetooth 5 links, i.e., the source IoT node to Drone A, Drone A to Drone B, and Drone B to the sink node. The RSS is measured on the transmission of the data packet and the acknowledgement packet, which provides both uplink and downlink channel quality. As observed, the uplink and downlink of each bluetooth channel are highly correlated along the flight of the autonomous drones, which reveals similarity of physical-layer interpretation of the airborne Bluetooth 5 communication. This can be potentially used for physical-layer security developments. The experiments in Figure 2 also confirm that the designed OBT for the drones can successfully relay the data for the ground IoT nodes using the Bluetooth 5 connection.

## 4 CONCLUSIONS

This paper demonstrates a multi-hop relay system for IoT based on the Bluetooth 5 connected autonomous drones. We develop a new lightweight OBT for reliable airborne bluetooth communications. A graphical user interface is presented to monitor the real-time

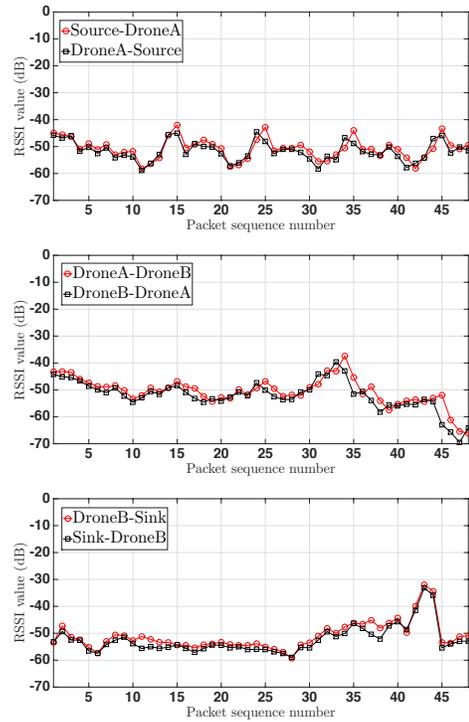

**Figure 2: RSS measurements of the airborne channels.**

flight trajectory of the autonomous drones and end-to-end data delivery performance. Preliminary RSS measurements on the testbed show high correlation of the uplink and downlink of the airborne bluetooth channel.

## ACKNOWLEDGMENTS

This work was partially supported by National Funds through FCT/MCTES (Portuguese Foundation for Science and Technology), within the CISTER Research Unit (UIDB/04234/2020); also by the Operational Competitiveness Programme and Internationalization (COMPETE 2020) under the PT2020 Partnership Agreement, through the European Regional Development Fund (ERDF), and by national funds through the FCT, within project(s) POCI-01-0145-FEDER-029074 (ARNET).

## REFERENCES

- [1] 2019. MindCentral. <https://airmind.gitbooks.io/central/content/supportedPlatforms.html>
- [2] 2019. MindPX. [http://www.mindpx.net/assets/accessories/MX400usermanual\\_v12.pdf](http://www.mindpx.net/assets/accessories/MX400usermanual_v12.pdf)
- [3] Margot Deruyck, Jorg Wyckmans, Luc Martens, and Wout Joseph. 2016. Emergency ad-hoc networks by using drone mounted base stations for a disaster scenario. In *WiMob*. IEEE, 1–7.
- [4] Anthony King et al. 2017. The future of agriculture. *Nature* 544, 7651 (2017), S21–S23.
- [5] Kai Li, Wei Ni, Eduardo Tovar, and Abbas Jamalipour. 2019. On-board Deep Q-Network for UAV-assisted Online Power Transfer and Data Collection. *IEEE Trans. Veh. Technol.* 68, 12 (2019), 12215–12226.
- [6] Kai Li, Wei Ni, Xin Wang, Ren Ping Liu, Salil S Kanhere, and Sanjay Jha. 2015. Energy-efficient cooperative relaying for unmanned aerial vehicles. *IEEE Trans. Mobile Comput.* 15, 6 (2015), 1377–1386.
- [7] Hamid Menouar, Ismail Guvenc, Kemal Akkaya, A Selcuk Uluogac, Abdullah Kadri, and Adem Tuncer. 2017. UAV-enabled intelligent transportation systems for the smart city: Applications and challenges. *IEEE Commun. Mag.* 55, 3 (2017), 22–28.